HEADY24
9176229

BENINCÀ TECHNOLOGY TO OPEN
MADE IN ITALY

EXTERNAL CONTROL PANELS
24 Vdc

APPLICATION
1 or 2 actuators for swing gates

CONTROL PANEL POWER SUPPLY
230 Vac

MOTORS POWER SUPPLY
24 Vdc 60W + 60W

MAIN FUNCTIONS:
- Built-in LCD display
- Built-in 433.92 MHz 64 codes and 3 codes radio receiver (programmable code, rolling code, ARC)
- Removable terminal blocks
- Separate limit switch inputs for each motor
- Open, close and pedestrian inputs
- Open-close and close photocell inputs
- N.C. or 8K2 safety edge input
- Gate open indicator light output, service light, second radio channel and test photocells
- Operating parameters autoset
- Electronic adjustment of individual couple for each motor
- Crush prevention security with amperometric sensor detection and encoder management
- Independent decelerations during open and close for each motor
- Optional parameter configuration and remote control management using the Advantouch system
- Number of manoeuvres
- Programming access password
- Maintenance reminder

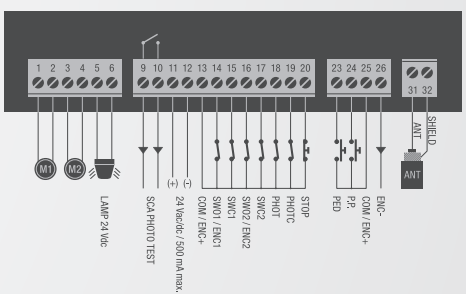

ACCESSORIES

DU.V96
9765035
12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/ external release.

DU.V90
9765030
12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/ external release.

DU.9990
9623010
Covering plate for DU.V90.

L.BY
9760024
Control board for electric lock 12/24 Vdc.

SC.RD
9760027
Board no. 4 relays for control unit inputs support/decoupling. For use in the event of very long connections (i.e. buttons in house).

BRAINY24.CB
9760014
Accessory with CBY.24V battery charger, 1.2 Ah batteries and base.



NIMH.CB
9760017
Accessory with CBY.24V battery charger card, NIMH batteries and support.

www.beninca.com