


Saloon40



MOTOR-POWERED
SWING-GATE
TURNSTILE




CAME

A step ahead of the rest.

Extremely compact motor-powered swing-leaf turnstile, featuring innovative and functional design!


Completely overhauled in terms of technology and design.

Saloon40 is engineered to control access points at sites with very high flow rates such as shopping malls, airports, railway stations and hospitals.

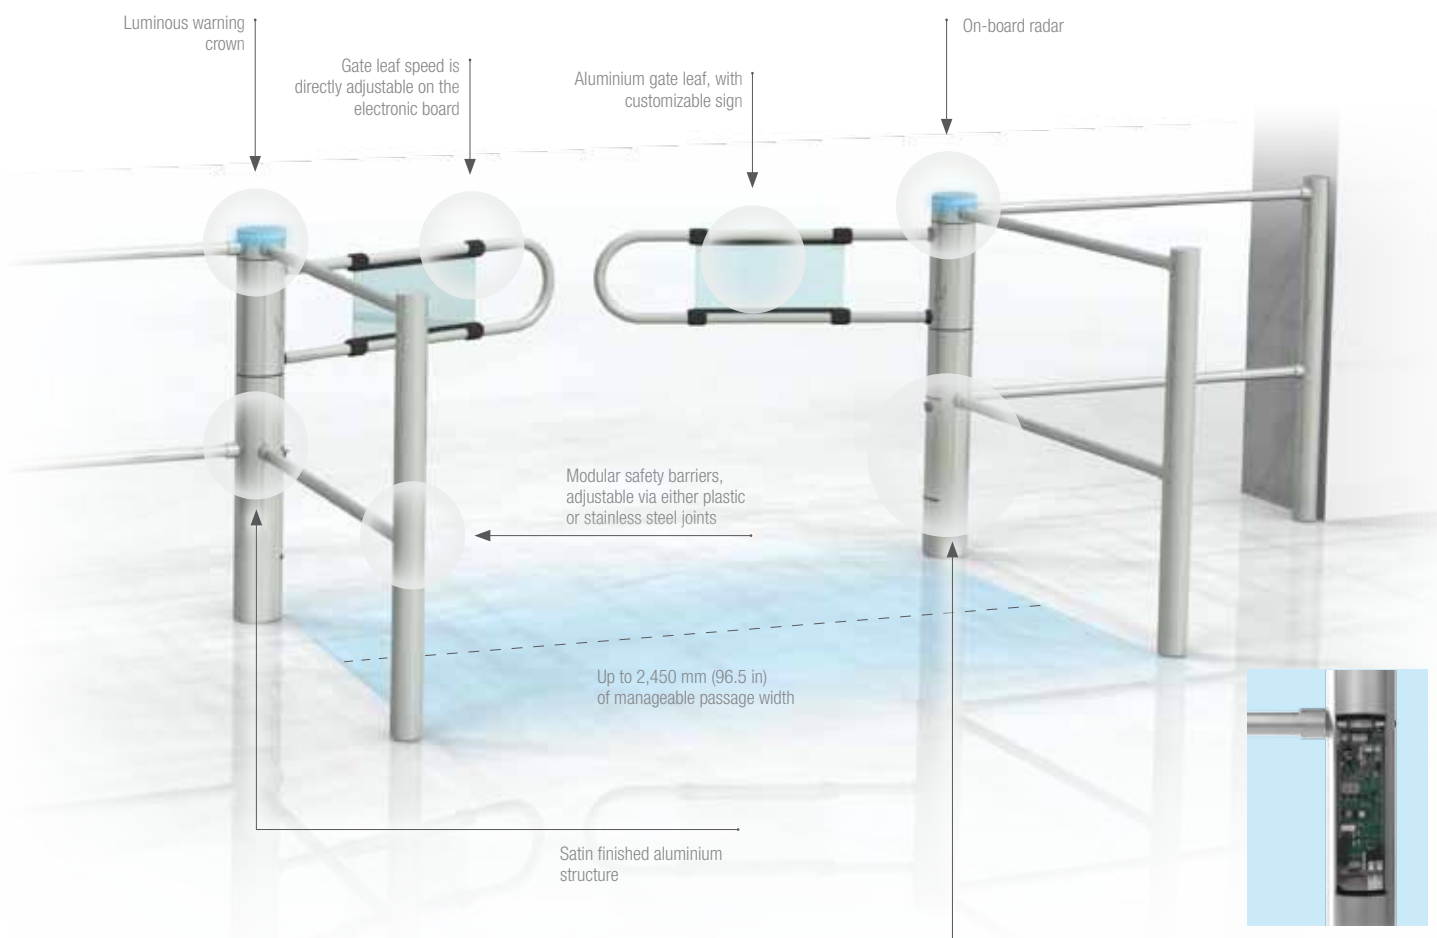

The electronic board and power source are built into the operator

Dimensions (mm)

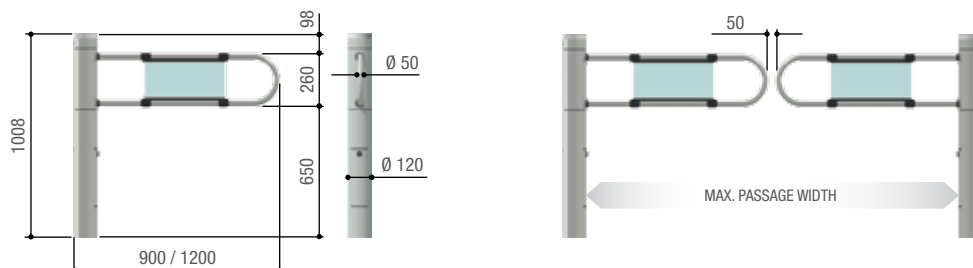

Benefits that become solutions.

AESTHETICALLY EVOLVED


- The electronic board and power supply units are contained in a diameter of just 120 mm.
- Luminous crown to warn when the gate leaf is moving and signal the state of operation.
- Radar built into the structure, for quick remote opening.
- Modularity: depending on the needs the luminous crown and radar are interchangeable.

DOUBLE PASSAGE


To manage pedestrian passages of up to 2,450 mm of width, two Saloon40s can be coupled.
Two gate leaves are available: the 900 mm and the 1,200 mm versions.

SAFE ACCESS AND MOVEMENT


- Opening via push button, photocell and radar, or via transponder or magnetic card reader.
- Encoder technology.
- Acoustic warning to signal attempts at forced entry.
- Can integrate a radar to remotely open the gate leaf.
- Reversible. In case of power outages, the operator lets you release it manually to enter and exit.
- Adjustable internal mechanical stops.
- Memory roll to ensure memorization of settings and users.



THE LUMINOUS WARNING RED CROWN announces that the gate leaf is closing.



THE LUMINOUS WARNING GREEN CROWN announces the opening of the gate leaf.



THE LUMINOUS WARNING BLUE CROWN announces that the gate leaf is closing (the pre-flashing time can be electronically adjusted).



Guaranteed by 24 Volts

Systems running at 24 Volts are super safe to use and very reliable under intense working conditions, such as those found at residential apartment complexes and industrial facilities. Moreover, 24 Volt systems work even during power outages, thanks to the optional batteries.



Read up at came.com about the full range of Came products!

Came is a market leading home, industrial, and special technological projects automation manufacturing company.

A full range of household solutions: from operators for gates and garage doors, to shutter and awning winding motors, and even home automation control, to burglar proof and video entry systems. Technology and reliability to serve your business, thanks to solutions designed for powering large industrial doors, automatic doors, street barriers, turnstiles, access control systems and parking facilities.





MODEL


PSSLN40

Protection rating (IP)	40
Power supply (V - 50/60 Hz)	120 - 230 AC
Operating power supply (V)	24 DC
Opening speed at 90° (s)	1
Power (W)	120
Operating temperature (°C / °F)	-20 ÷ +55 / -4 ÷ +131

● 24 V DC

SOME VERSIONS MAY NOT BE AVAILABLE IN YOUR COUNTRY. FOR MORE INFORMATION PLEASE CHECK WITH YOUR LOCAL AUTHORIZED DEALER.

DEDICATED ACCESSORIES

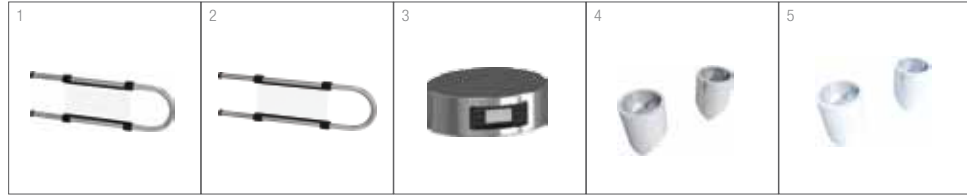

1. Aluminium gate leaf L = 900 mm.
2. Aluminium gate leaf L = 1,200 mm.
3. Activation radar.
4. Kit of two plastic chrome finished sleeves for anchoring the safety barriers.
5. Kit of two AISI 304 stainless steel sleeves for anchoring the safety barriers.

SYSTEM'S COMPLEMENTARY ELEMENTS



1. Monodirectional safety barrier for cart transit. Available with two, three or four arches.
2. Floor anchored safety barrier in AISI 304 stainless steel with polycarbonate panel; thickness 6 mm (0.23 in). H = 900 mm (35.4 in).
3. Floor anchored safety barrier in AISI 304 stainless steel without panel. H = 900 mm (35.4 in).
4. AISI 304 stainless steel safety barrier with antipanic handle. Available with left or right hand post. L = 900 o 1,200 mm (35.4 or 47.2 in), H = 1,000 mm (39.3 in).
5. Galvanized steel riser with anchoring flange and flange cover. H = 980 mm (38.6 in). Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes.
6. AISI 304 stainless steel riser plus anchoring flange and flange cover. H = 980 mm (38.6 in). Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes.
7. Transparent polycarbonate panel 6 mm thick. L = 750 mm (29.5 in), H = 800 mm (31.5 in).
8. AISI 304 stainless steel riser. H = 900 mm (35.4 in), Ø 80 mm (3.15 in). Available without clips, with 2 clips, with 2+2 90° or 180° clips, with 6 clips, with 8 clips.
9. Joining sleeves. Available in chromed plastic, AISI 304 stainless steel and AISI 304 stainless steel specifically for wall mounting.
10. Horizontal tube for AISI 304 stainless steel safety barriers. Ø 40 mm (1.57 in) thickness 1 mm (0.04 in). Available in several measurements: 500, 1,000, 1,500, 2,000 mm (19.7, 39.4, 59.1, 78.7 in).



GARANZIA QUALITÀ ORIGINALE

Came products are entirely designed and made in ITALY



Came S.p.A. is Quality and Environmentally certified by UNI EN ISO 9001 UNI EN ISO 14001



© CAME SPA - KDEP#CEN2DA3S114 - JAN_2014 - EN

Even partial reproduction is prohibited • Came reserves the right to make any changes to this document at any time



Came S.p.A.

Via Martiri della Libertà, 15
Dossone di Casier
Treviso - Italy

www.came.com

Came is a company of
CAMEGROUP