



CP.BULL8-OM



## INTERNAL CONTROL PANELS

230 Vac



### APPLICATION

1 actuator for sliding gate series BULL8M and BULL8 OM

### CONTROL PANEL POWER SUPPLY


230 Vac

### MOTORS POWER SUPPLY

230 Vac 280W

### MAIN FUNCTIONS:

- Built-in LCD display
- Built-in 433.92 MHz 64 codes and 2 codes radio receiver (programmable code and rolling code)
- Removable terminal blocks
- Encoder input for obstruction detection
- Motor limit switch inputs
- Independent open and close photocell inputs
- Pedestrian input
- Output for gate open indicator light, second radio channel, test photocells and service light
- Operating parameters autaset
- Electronic torque adjustment
- Open and close deceleration
- Electronic braking
- Optional parameter configuration and remote control management using the Advantouch system
- Number of manoeuvres
- Programming access password

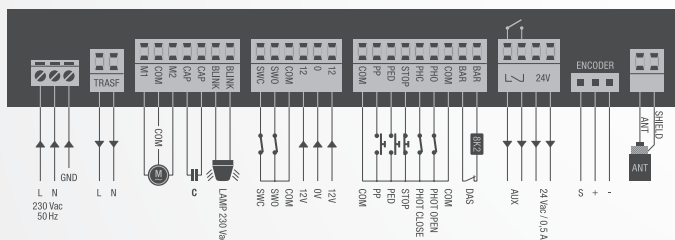

## ACCESSORIES



**DA.2S**  
9760100

Electronic card that allows synchronised movement of 2 automations (facing doors).



**SC.RD**  
9760027

Board no. 4 relays for control unit inputs support/decoupling. For use in the event of very long connections (i.e. buttons in house).

