



## EXTERNAL CONTROL PANELS 24 Vdc



### APPLICATION

1 or 2 actuators for swing gates, opposing sliding gates, and industrial folding doors with a maximum of 2 sections

### CONTROL PANEL POWER SUPPLY


230 Vac

### MOTORS POWER SUPPLY

24 Vdc 120W + 120W

### MAIN FUNCTIONS:

- Built-in LCD display
- Built-in 433.92 MHz 64 codes and 3 codes radio receiver (programmable code, rolling code, ARC)
- Removable terminal blocks
- Separate limit switch inputs for each motor
- Open, close and pedestrian inputs
- Open-close and close photocell inputs
- N.C. or 8K2 safety edge input
- 12 Vdc electric lock output
- Gate open indicator light output, service light, second radio channel and test photocells
- Operating parameters autose
- Electronic adjustment of individual couple for each motor
- Crush prevention security with amperometric sensor detection and encoder management
- Independent decelerations during open and close for each motor
- Optional parameter configuration and remote control management using the Advantouch system
- Number of manoeuvres
- Programming access password
- Maintenance reminder

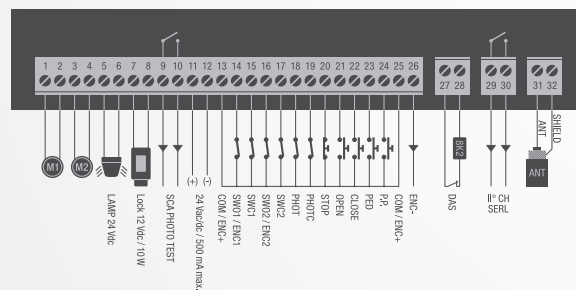

## ACCESSORIES



**DU.V96**  
9765035

12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



**DU.V90**  
9765030

12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



**DU.9990**  
9623010

Covering plate for DU.V90.




**SC.RD**  
9760027

Board no. 4 relays for control unit inputs support/decoupling. For use in the event of very long connections (i.e. buttons in house).



**DA.LB**  
9230031

Galvanized column for outdoor installation of LB box. Packaging: 2 pcs



**BRAINY24.CB**  
9760014

Accessory with CBY.24V battery charger, 1.2 Ah batteries and base.



**NIMH.CB**  
9760017

Accessory with CBY.24V battery charger card, NIMH batteries and support.

