



CP.MBY24



INTERNAL CONTROL PANELS 24 Vdc



APPLICATION

1 or 2 actuators for MBE24 series swing gates

CONTROL PANEL POWER SUPPLY


230 Vac

MOTORS POWER SUPPLY

24 Vdc 90W + 90W

MAIN FUNCTIONS:

- Built-in LCD display
- Built-in 433.92 MHz 64 codes and 3 codes radio receiver (programmable code, rolling code, ARC)
- Removable terminal blocks
- Separate limit switch inputs for each motor
- Open, close and pedestrian inputs
- N.C. or 8K2 safety edge input
- 12 Vdc electric lock output
- Gate open indicator light output, service light, second radio channel and test photocells
- Operating parameters autotest
- Electronic adjustment of individual couple for each motor
- Crush prevention security with amperometric sensor detection
- Independent decelerations during open and close for each motor
- Optional parameter configuration and remote control management using the Advantouch system
- Number of manoeuvres
- Programming access password
- Maintenance reminder

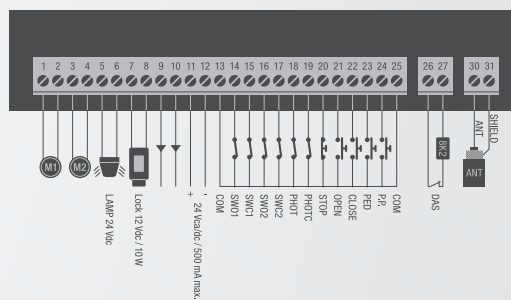

ACCESSORIES



DU.V96
9765035

12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



DU.V90
9765030

12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



DU.9990
9623010

Covering plate for DU.V90.



SC.RD
9760027

Board no. 4 relays for control unit inputs support/decoupling. For use in the event of very long connections (i.e. buttons in house).



CBY.24V
9760016

Battery charger card. The CBY.24V card allows to charge two different types of nickel metalhydrate and lead batteries.



DA.BT2
F8086010

2.1Ah 12 Vdc Battery

DA.BT6
F8086020

7Ah 12 Vdc Battery



LB
9252001

Standard box for control units. Protection level IP55. (290 x 220 x 118 mm)

